

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 61-247515

(43)Date of publication of application : 04.11.1986

(51)Int.Cl.

B60J 7/10  
B62D 25/04

(21)Application number : 60-091748

(71)Applicant : MAZDA MOTOR CORP

(22)Date of filing : 26.04.1985


(72)Inventor : MAEDA TATSUO  
KUNISHIMA TETSUO

## (54) UPPER BODY STRUCTURE FOR AUTOMOBILE

## (57)Abstract:

PURPOSE: To improve the external appearance and functioning of a car body so better, by installing an interlocking mechanism which holds a cover member covering a housing part at a closing position when a tiltable pillar situated in both rising and housing positions and, when this tiltable pillar moves between these positions, makes this cover member operate for opening.

CONSTITUTION: An open-top type automobile is provided with a housing part 1 and a trunk room 2 at the rear of its body, and a rear part of a tiltable pillar 3 rising from a front part of the housing part 1 is covered with a rear cover member 4, while a rear part of the housing part 1 is covered with an on-off type cover member 6. In this case, a pinion 14 is rotated by a motor 15 via a transmission shaft 16, and furthermore a sector 13 to be engaged with this pinion 14 is rotated around a pin 9. And, with rotation of the sector 13, for example, toward a downward direction, the tiltable pillar 3 unitized with this sector is rotated rearward. Likewise, with rotation of this sector 13, the cover part 6 is interlockingly rotated upward around a pin 12 via link mechanisms 17W19.

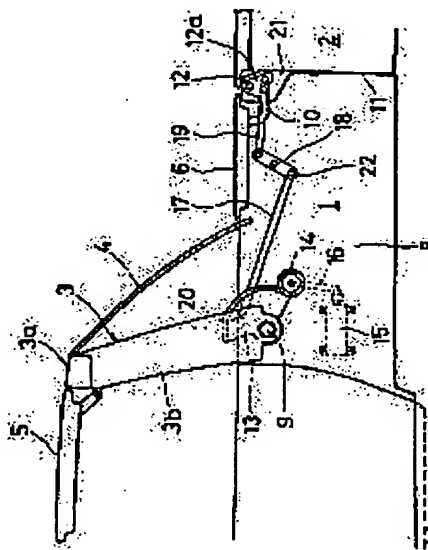

## LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office